
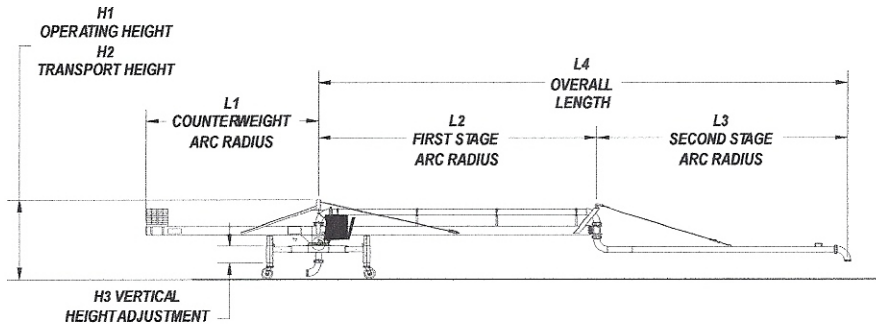


MANUAL KRETE-PLACER 40'

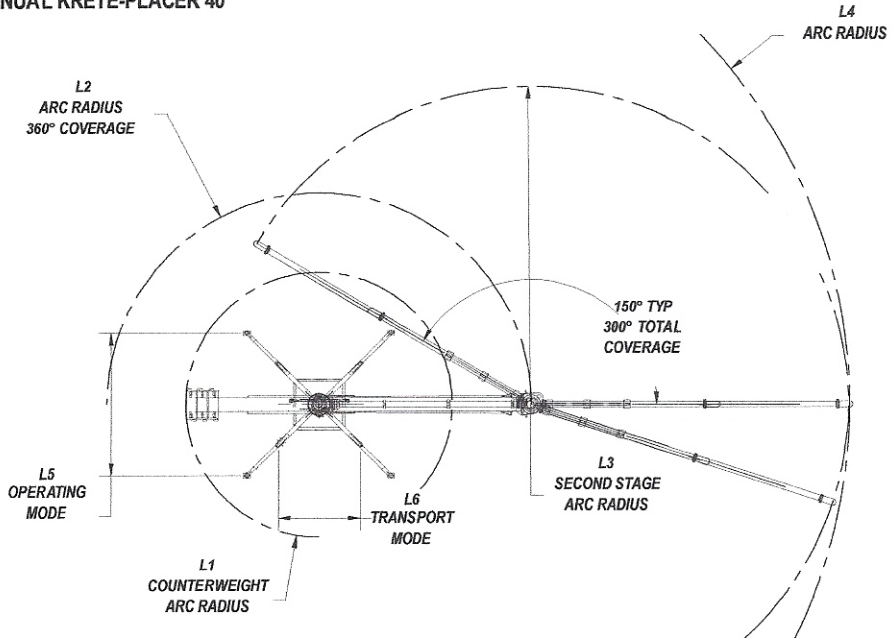

MODEL	H1	H2	H3	L1	L2	L3	L4	L5	L6
DP5040	6' MINIMUM 7'-3" MAXIMUM	5' - 1/2" W/O CASTERS 6" W/CASTERS	15"	13'-0"	21'-0"	18' 10-3/4"	39' 10-3/4"	7' 4"	5'-1/2"

ESTIMATED WEIGHTS:

BOOM ASSEMBLY = 1600 lbs.

CART ASSEMBLY = 775 lbs.


COUNTERWEIGHTS = 1560 lbs.

TOTAL DRY WEIGHT = 4935 lbs.

CONCRETE = 550 lbs.

TOTAL W/ CONCRETE = 5035 lbs.

POWERED KRETE-PLACER 40' THREE (3) FUNCTION (SHOWN)

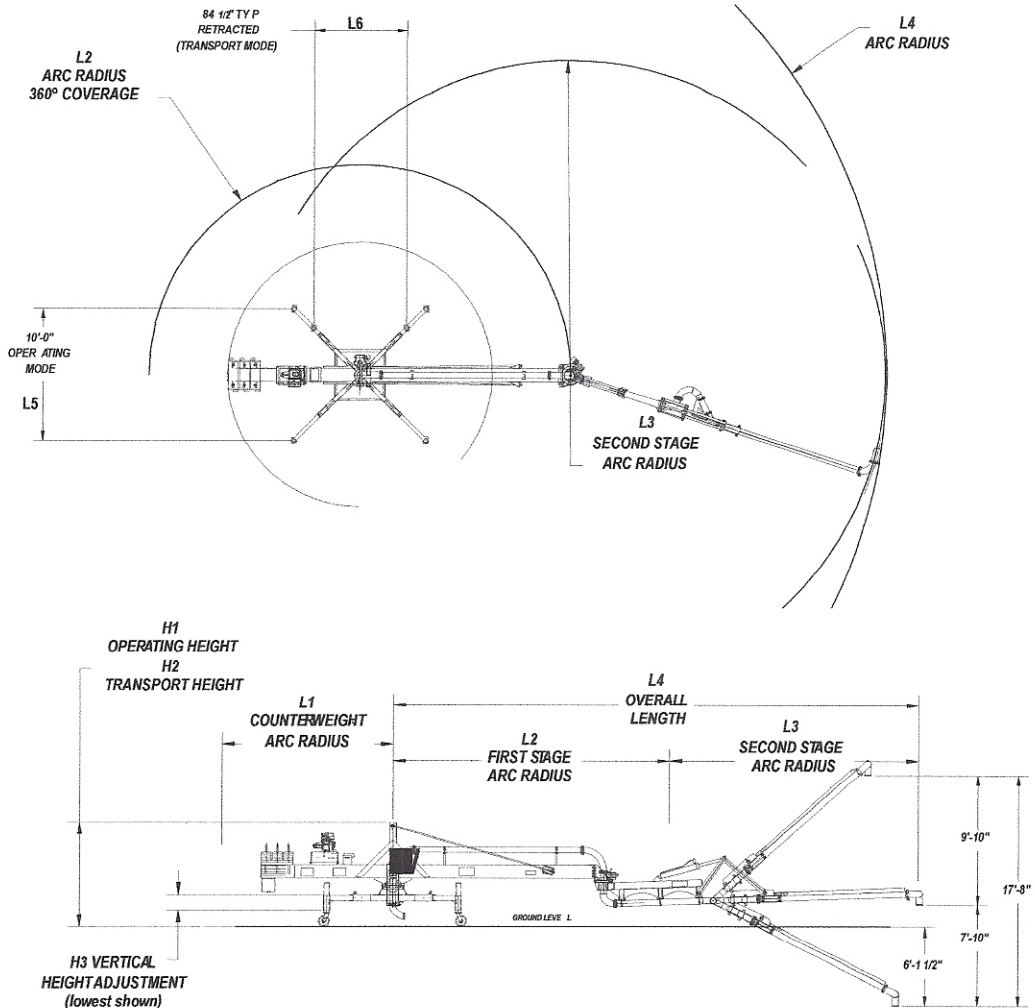

MODEL	H1	H2	H3	L1	L2	L3	L4	L5	L6
DP5040HYD-3-COM	7'-10 3/4" MINIMUM 9'-1 3/4" MAXIMUM	6' - 10 1/4" W/O CASTERS 7'-10 3/4" W/CASTERS	15"	10'-1 1/4"	16'-0"	24'-0"	40'-0"	10'-0"	7'-1 1/2"

SPECIFICATIONS:
 5" 7 GA. HEAT TREATED PIPE
 5" - 18" CLR ELBOWS
 HEAVY DUTY SLEWING BEARINGS
 10" DIA. CASTER WHEELS
 18" ADJUSTMENT FOR PLACER HEIGHT
 HYDRAULIC UNITS ARE GASOLINE OR OPTIONAL EL. POWERED
 RADIO REMOTE HAS JOYSTICK CONTROL WITH MANUAL OVERRIDES

APPROXIMATE WEIGHTS:
 DP5040HYD-3-COM
 TOTAL DRY WEIGHT = 7300 lbs.
 CONCRETE = 900 lbs.
 TOTAL LW CONCRETE = 8200 lbs.